

TRAUMA SYSTEM



 **IMAGE[®]**
ORTHO. SURGICAL PVT. LTD.
An ISO 13485 Certified Company

F.D.A.
Certified Co.

ISO 13485-2003
Certified

ISO 9001:2008
Certified

CE

www.imageorthosurgical.com

INDEX

INTRODUCTION	3
BONE SCREW	4 - 6
BONE PLATE	7 - 8
HEAD, NAIL, PIN, WIRE	9 - 10
LOCK. SCREW	11
LOCK. PLATE	12 - 17
HIP PROSTHESIS SYSTEM	18 - 19
EXTERNAL FIXATION (Clamp Type)	20
EXTERNAL FIXATION (Ring Type)	21 - 22



INTRODUCTION

IMAGE Ortho Surgical incorporates a business concept of developing & marketing of orthopedic implants & instrument in whole country since 1995.

IMAGE have quality management system approved by international standard organization. We qualified with all the international quality standard like mfg. FDA, ISO 13485, CE & ISO 9001:2008 certificate.

Quality has main characteristic for success of **IMAGE** Product. Each every product developing & marketing by as under goes meticulous quality surveillance with required documentation. To be able to meet the need of verities of ortho implants. We offer you a worldwide range of orthopedics product like Lock Plate, Lock Screw, Spine Implant, Bone Plate, Bone Screw, Interlocking Nail, Hip Prosthesis, Ilizrov & many more.

We committed to total customer satisfaction by providing “excellent quality with best service”. As well as we maintain our position as a leading reliable supplier in whole country.

We always ready to supply the best quality product as per the day to day market requirement. As well as our marketing representative who also get the feed back of customer on product & service.

CERTIFICATION



CORTICAL SCREW (Hex.) 4.5 mm - Self Tapping CAT NO. 101



Thread Diameter : 4.5 mm
 Drill bit for thread hole : 3.2 mm
 Pitch : 1.75 mm
 Hexagonal Socket : 3.5 mm
 Head Diameter : 8.0 mm
Size : 12 mm to 60 mm with 2 mm Variation

CANCELLOUS SCREW (Hex.) 4 mm x Full Thread CAT NO. 105




Thread Diameter : 4.0 mm
 Drill bit for thread hole : 2.7 mm
 Pitch : 1.75 mm
 Hexagonal Socket : 2.5 mm
 Head Diameter : 6.0 mm
Size : 15 mm to 80 mm with 5 mm Variation

CORTICAL SCREW (Hex.) 3.5 mm - Self Tapping CAT NO. 102




Thread Diameter : 3.5 mm
 Drill bit for thread hole : 2.7 mm
 Pitch : 1.25 mm & 1.75 mm
 Hexagonal Socket : 2.5 mm
 Head Diameter : 6.0 mm
Size : 8 mm to 60 mm with 2 mm Variation

CANNULATED CANCELLOUS SCREW (Hex.) Self Tapping (4 mm x 16 mm Thread) CAT NO. 106

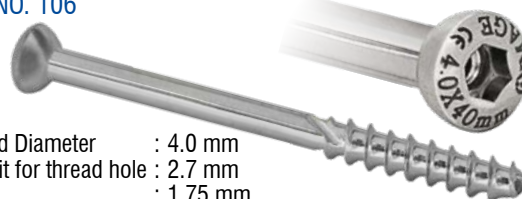


Thread Diameter : 4.0 mm
 Drill bit for thread hole : 2.7 mm
 Pitch : 1.75 mm
 Hexagonal Socket : 2.5 mm
 Cannulation : 1.25 mm
 Guide Wire Use : 1.0 mm
Size : 10 mm to 75 mm with 5 mm Variation

CORTICAL SCREW (Hex.) 2.7 mm - Self Tapping CAT NO. 103

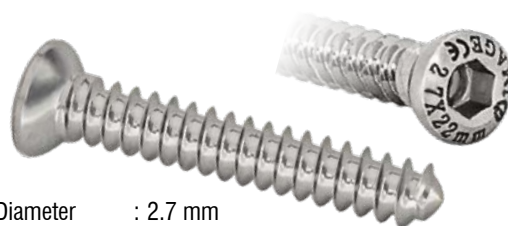

Thread Diameter : 2.7 mm
 Drill bit for thread hole : 2.0 mm
 Hexagonal Socket : 2.5 mm
 Head Diameter : 5.0 mm
Size : 6 mm to 36 mm with 2 mm Variation

CANNULATED CANCELLOUS SCREW (Hex.) Self Tapping (4 mm x Full Thread) CAT No. 107

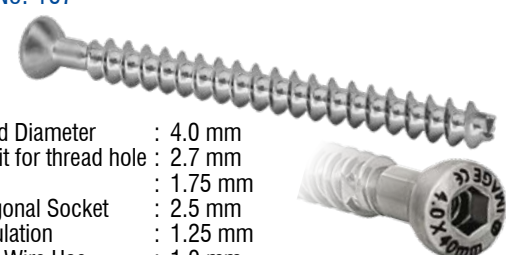

Thread Diameter : 4.0 mm
 Drill bit for thread hole : 2.7 mm
 Pitch : 1.75 mm
 Hexagonal Socket : 2.5 mm
 Cannulation : 1.25 mm
 Guide Wire Use : 1.0 mm
Size : 15 mm to 75 mm with 5 mm Variation

CANCELLOUS SCREW (Hex.) 4 mm x 16 mm Thread CAT No. 104



Thread Diameter : 4.0 mm
 Drill bit for thread hole : 2.7 mm
 Pitch : 1.75 mm
 Hexagonal Socket : 2.5 mm
 Head Diameter : 6.0 mm
Size : 15 mm to 80 mm with 5 mm Variation

CANCELLOUS SCREW (Hex.) Self Tapping (6.5 mm x 16 mm Thread) CAT No. 108



Thread Diameter : 6.5 mm
 Drill bit for thread hole : 4.5 mm
 Thread Length : 16 mm
 Pitch : 2.75 mm
 Hexagonal Socket : 3.5 mm
 Head Diameter : 8.0 mm
Size : 25 mm to 100 mm with 5 mm Variation

CANCELLOUS SCREW (Hex.) Self Tapping (6.5 mm x 32 mm Thread)

CAT NO. 109


Thread Diameter : 6.5 mm
Drill bit for thread hole : 4.5 mm
Thread Length : 32 mm
Pitch : 2.75 mm
Hexagonal Socket : 3.5 mm
Head Diameter : 8.0 mm
Size : 35 mm to 100 mm with 5 mm Variation



CANNULATED CANCELLOUS SCREW (Hex.) Self Tapping (6.5 mm x Full Thread)

CAT No. 113

Thread Diameter : 6.5 mm
Drill bit for thread hole : 4.5 mm
Pitch : 2.75 mm
Hexagonal Socket : 3.5 mm
Head Diameter : 8.0 mm
Cannulation : 2.2 mm
Guide Wire Use : 1.8 mm
Size : 25 mm to 100 mm with 5 mm Variation

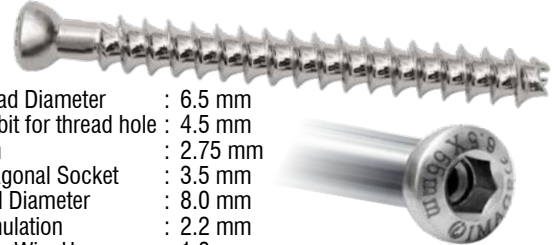

CANCELLOUS SCREW (Hex.) Self Tapping (6.5 mm x Full Thread)

CAT No. 110

Thread Diameter : 6.5 mm
Drill bit for thread hole : 4.5 mm
Pitch : 2.75 mm
Hexagonal Socket : 3.5 mm
Head Diameter : 8.0 mm
Size : 25 mm to 100 mm with 5 mm Variation



MALLEOLAR SCREW (Hex.) 4.5 mm

CAT No. 114

Thread Diameter : 4.5 mm
Drill bit for thread hole : 3.2 mm
Pitch : 1.75 mm
Hexagonal Socket : 3.5 mm
Head Diameter : 8.0 mm
Size : 25 mm to 100 mm with 5 mm Variation



CANNULATED CANCELLOUS SCREW (Hex.) Self Tapping (6.5 mm x 16 mm Thread)

CAT No. 111

Thread Diameter : 6.5 mm
Drill bit for thread hole : 4.5 mm
Pitch : 2.75 mm
Hexagonal Socket : 3.5 mm
Head Diameter : 8.0 mm
Cannulation : 2.2 mm
Guide Wire Use : 1.8 mm
Size : 25 mm to 120 mm with 5 mm Variation



D. H. SCREW

CAT No. 115

Thread Diameter : 12.5 mm
Thread Length : 22.0 mm
Shaft Diameter : 8.0 mm
Pitch : 3.0 mm
Size : 50 mm to 120 mm with 5 mm Variation



CANNULATED CANCELLOUS SCREW (Hex.) Self Tapping (6.5 mm x 32 mm Thread)

CAT No. 112

Thread Diameter : 6.5 mm
Drill bit for thread hole : 4.5 mm
Pitch : 2.75 mm
Hexagonal Socket : 3.5 mm
Head Diameter : 8.0 mm
Cannulation : 2.2 mm
Guide Wire Use : 1.8 mm
Size : 25 mm to 100 mm with 5 mm Variation



INTERLOCKING BOLT (Hex.) 4.9 mm

CAT No. 116

Thread Diameter : 4.9 mm
Drill bit for thread hole : 4.0 mm
Hexagonal Socket : 3.5 mm
Head Diameter : 8.0 mm
**Size : 22 mm to 60 mm with 2 mm Variation
60 mm to 90 mm with 5 mm Variation**



INTERLOCKING BOLT (Hex.) 3.9 mm

CAT No. 117



Thread Diameter : 3.9 mm
 Drill bit for thread hole : 3.2 mm
 Hexagonal Socket : 3.5 mm
 Head Diameter : 6.0 mm
Size : 22 mm to 64 mm with 2 mm Variation

HIP SOCIETY SCREW (TRACTION SCREW)

CAT No. 121



Size : 4.5 mm to 6 mm with 0.5 mm Variation

P. F. N. BOLT (Hex.) 6.4 mm x Cannulated - Self Tapping

CAT No. 119



Thread Diameter : 6.4 mm Head Diameter : 8.0 mm
 Drill bit for thread hole : 4.5 mm Cannulation : 2.2 mm
 Hexagonal Socket : 3.5 mm Guide Wire Use : 1.8 mm
Size : 50 mm to 115 mm with 5 mm Variation

HERBERT SCREW

CAT No. 123




Size : 12 mm to 40 mm at 2 mm Variation
40 mm to 70 mm at 5 mm Variation

P. F. N. BOLT (Hex.) 8.0 mm x Cannulated - Self Tapping

CAT No. 120



Thread Diameter : 8 mm Head Diameter : 10.0 mm
 Drill bit for thread hole : 5.5 mm Cannulation : 2.2 mm
 Hexagonal Socket : 3.5 mm Guide Wire Use : 1.8 mm
Size : 45 mm to 110 mm with 5 mm Variation

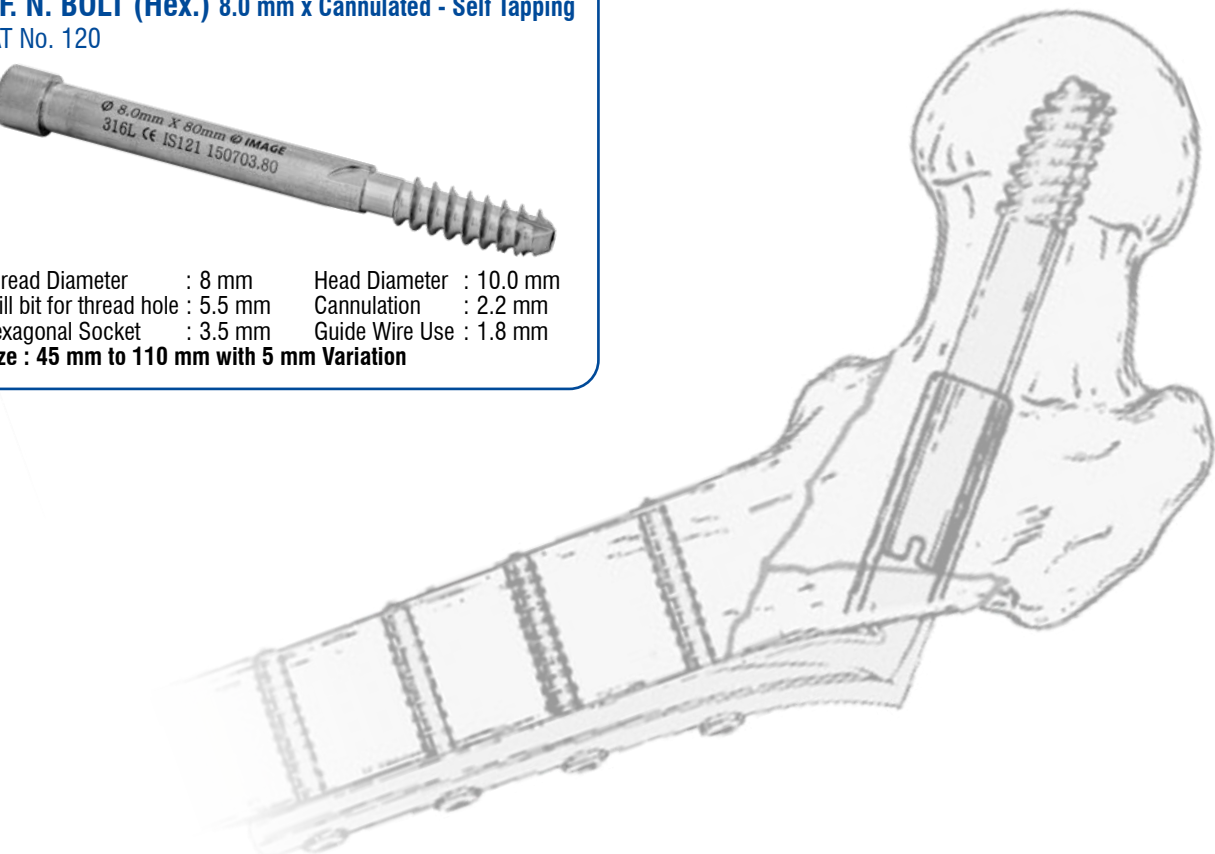

L.C.D.C. PLATE (3.5 mm x Small)

CAT No. 202



Thickness : 4.0 mm
Width : 11.0 mm
Hole Space : 13.0 mm
Size : 4 Hole to 14 Hole Fixation with 3.5 mm Screw

D.C. PLATE (4.5 mm x Narrow)

CAT No. 206



Thickness : 3.6 mm
Width : 12.0 mm
Hole Space : 16.0 mm
Size : 4 Hole to 20 Hole Fixation with 4.5 mm Screw

L.C.D.C. PLATE (4.5 mm x Narrow)

CAT No. 203



Thickness : 4.6 mm
Width : 13.5 mm
Hole Space : 18.0 mm
Size : 4 Hole to 18 Hole Fixation with 4.5 mm Screw

D.C. PLATE (4.5 mm x Broad)

CAT No. 207



Thickness : 4.5 mm
Width : 16.0 mm
Hole Space : 16.0 mm
Size : 5 Hole to 24 Hole Fixation with 4.5 mm Screw

L.C.D.C. PLATE (4.5 mm x Broad)

CAT No. 204



Thickness : 6.0 mm
Width : 17.5 mm
Hole Space : 18.0 mm
Size : 6 Hole to 18 Hole Fixation with 4.5 mm Screw

SEMI TUBULAR PLATE (4.5 mm)

CAT No. 208



Thickness : 1.5 mm
Width : 11.0 mm
Hole Space : 16.0 mm
Size : 4 Hole to 14 Hole Fixation with 4.5 mm Screw

D.C. PLATE (3.5 mm x Small)


CAT No. 205



Thickness : 3.0 mm
Width : 10.0 mm
Hole Space : 12.0 mm
Size : 4 Hole to 18 Hole Fixation with 3.5 mm Screw

ONE-THIRD TUBULAR PLATE (3.5 mm)

CAT No. 209

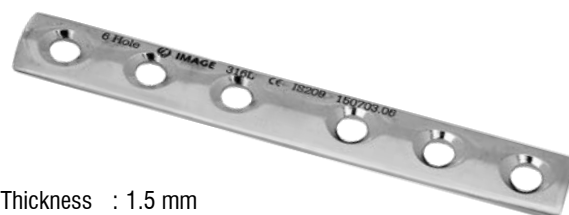

Thickness : 1.5 mm
Width : 9.0 mm
Hole Space : 12.0 mm
Size : 4 Hole to 12 Hole Fixation with 3.5 mm Screw

D.H.S. PLATE (D.C. Hole)

CAT No. 213



Thickness : 6.2 mm
 Width : 19.0 mm
 Hole Space : 16.0 mm
 Outer Barrel Diameter : 12.5 mm
 Barrel Length : 38 mm
Size : 4 Hole to 16 Hole
Fixation Screw Dia. : 4.5 mm
 Note : Round Holes Plate available too

T. OBLIQUE PLATE (3.5 mm)


CAT No. 219



Thickness : 1.5 mm
 Width : 10.0 mm
Size : 3 Hole to 8 Hole
Fixation with 3.5 mm & 4.0 mm Screws

D.C.S. PLATE - 95° (D.C. HOLE)

CAT No. 215

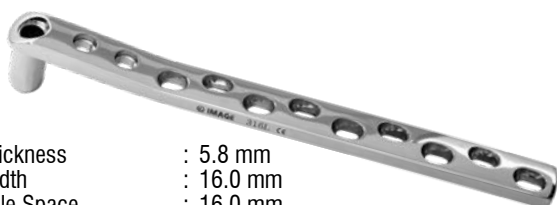

Thickness : 5.8 mm
 Width : 16.0 mm
 Hole Space : 16.0 mm
 Outer Barrel Dia Meter : 12.5 mm
Size : 5 Hole to 18 Hole
Fixation Screw Dia. : 4.5 mm & 6.5 mm
 Note : Round Holes Plate available too

T. RADIUS PLATE (3.5 mm)


CAT No. 220



Thickness : 1.5 mm
 Width : 10 mm
Size : 6 Hole to 14 Hole
Fixation with 3.5 mm & 4.0 mm Screws

L. BUTTRESS PLATE (LEFT & RIGHT)

CAT No. 217

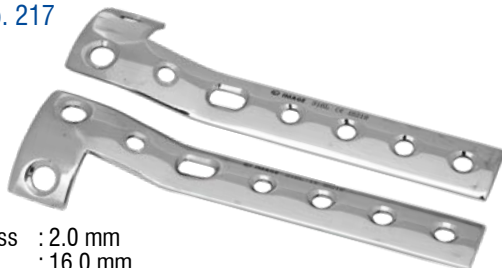

Thickness : 2.0 mm
 Width : 16.0 mm
 Hole Space : 12.0 mm
Size : 3 Hole to 12 Hole
Fixation with 4.5 mm & 6.5 mm Screws

Y. PLATE

CAT No. 222



Thickness : 2.0 mm
 Width : 10.0 mm
 Hole Space : 12.0 mm
Size : 2 Hole to 8 Hole
Fixation with 4.5 mm Screws

T. BUTTRESS PLATE (4.5 mm)

CAT No. 218



Thickness : 2.0 mm
 Width : 17.0 mm
Size : 3 Hole to 20 Hole
Fixation with 4.5 mm & 6.5 mm Screws

RECONSTRUCTION PLATE (3.5 mm & 4.5 mm)

CAT No. 223



Width : 10.0 mm
 Hole Space : 12.0 mm
Size : 6 Hole to 18 Hole
Fixation with 2.7 mm, 3.5 mm & 4.5 mm Screws

INTERLOCKING NAIL (TIBIA) UPPER BEND

CAT No. 301



8 mm : 280 mm to 380 mm with 20 mm variation
 9 mm : 280 mm to 380 mm with 20 mm variation
 10 mm : 280 mm to 380 mm with 20 mm variation
 11 mm : 280 mm to 380 mm with 20 mm variation

P. F. NAIL (130° & 135°) (LEFT & RIGHT)

CAT No. 307



9 mm : 340 mm to 460 mm with 20 mm variation
 10 mm : 340 mm to 460 mm with 20 mm variation
 11 mm : 340 mm to 460 mm with 20 mm variation
 12 mm : 340 mm to 460 mm with 20 mm variation

INTERLOCKING NAIL (FEMUR)

CAT No. 302



9 mm : 340 mm to 480 mm with 20 mm variation
 10 mm : 340 mm to 480 mm with 20 mm variation
 11 mm : 340 mm to 480 mm with 20 mm variation
 12 mm : 340 mm to 480 mm with 20 mm variation

EXPERT TIBIA NAIL

CAT No. 308



8 mm : 280 mm to 380 mm with 20 mm variation
 9 mm : 280 mm to 380 mm with 20 mm variation
 10 mm : 280 mm to 380 mm with 20 mm variation
 11 mm : 280 mm to 380 mm with 20 mm variation

INTERLOCKING NAIL (HUMERUS)

CAT No. 303



6 mm : 180 mm to 300 mm with 20 mm variation (Solid)
 7 mm : 180 mm to 300 mm with 20 mm variation (Cannulated)
 8 mm : 180 mm to 300 mm with 20 mm variation (Cannulated)

EXPERT FEMUR NAIL (LEFT & RIGHT)

CAT No. 309



9 mm : 340 mm to 440 mm with 20 mm variation
 10 mm : 340 mm to 440 mm with 20 mm variation
 11 mm : 340 mm to 440 mm with 20 mm variation

SUPRACONDYLAR NAIL (I.M.S.C.)

CAT No. 304



10 mm : 150 mm to 300 mm with 50 mm variation
 11 mm : 150 mm to 300 mm with 50 mm variation
 12 mm : 150 mm to 300 mm with 50 mm variation

ELASTIC NAIL

CAT No. 310



Size : 20 mm to 50 mm
 Length : 440 mm

P. F. NAIL (130° & 135°)

CAT No. 306



9 mm x 250 mm 11 mm x 250 mm
 10 mm x 250 mm 12 mm x 250 mm

SQUARE NAIL (RADIUS & ULNA)

CAT No. 311



Size : 2 mm to 4 mm
 Length : 180 mm to 300 mm with 20 mm variation

RUSH NAIL

CAT No. 312



Size : 2 mm to 4.5 mm
 Length : 180 mm to 300 mm with 20 mm variation

K. WIRE (Double Ended)

CAT No. 319



Size : 1 mm to 3 mm with 0.5 mm variation
 Length : 6", 9" & 12"

ENDERS NAIL

CAT No. 313



2.5 mm : 180 mm to 300 mm with 20 mm variation
 3.0 mm : 180 mm to 300 mm with 20 mm variation
 3.5 mm : 180 mm to 400 mm with 20 mm variation
 4.0 mm : 180 mm to 460 mm with 20 mm variation
 4.5 mm : 260 mm to 500 mm with 20 mm variation

K. WIRE THREADED (Double Ended)

CAT No. 320



Size : 1 mm to 3 mm with 0.5 mm variation
 Length : 6" & 12"

STEINMAN PIN

CAT No. 314



Size : 3 mm to 5 mm
 Length : 9" Long

S.S. WIRE (T.B.W.)

CAT No. 321



Size : 16 g. to 32 g.

SCHANZ PIN

CAT No. 316



Size : 2.5 mm to 4.5 mm

WASHER

CAT No. 327



Size : 4 mm & 6.5 mm

LOCK. CORTICAL SCREW (2.7 mm x Hex.)
CAT No. 401



Size : 12 mm to 30 mm at 2 mm Variation

LOCK. CANCELLOUS SCREW (4 mm x Full Thread)
CAT No. 405




Size : 12 mm to 85 mm at 2 mm Variation

LOCK. CORTICAL SCREW (3 mm x Hex.)
CAT No. 402



Size : 12 mm to 60 mm at 2 mm Variation

LOCK. CANCELLOUS SCREW (5 mm x Full Thread)
CAT No. 406

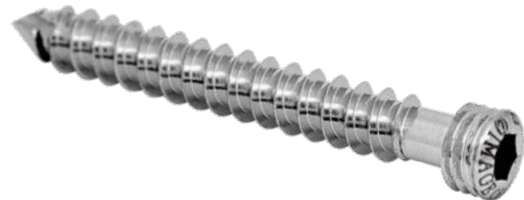

Size : 20 mm to 80 mm at 5 mm Variation

LOCK. CORTICAL SCREW (4 mm x Hex.)
CAT No. 403



Size : 12 mm to 50 mm at 2 mm Variation
55 mm to 90 mm at 5 mm Variation

LOCK. CANCELLOUS SCREW (6.5 mm x 16 mm Thread)
CAT No. 407




Size : 30 mm to 100 mm at 5 mm Variation

LOCK. CORTICAL SCREW (5 mm x Hex.)
CAT No. 404



Size : 12 mm to 85 mm at 2 mm Variation

LOCK. CANCELLOUS SCREW (6.5 mm x Full Thread)
CAT No. 408

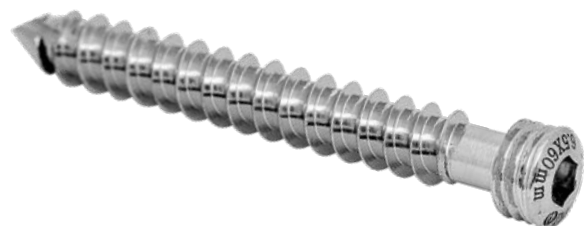

Size : 25 mm to 110 mm at 5 mm Variation

LOCK. D.C. PLATE (3.5 mm x R/U)
 CAT No. 501



Size : 4 Hole to 12 Hole
 Fixation with 4 mm Lock. Screw

LOCK. DISTAL FEMUR PLATE (LEFT & RIGHT)
 CAT No. 505



Size : 4 Hole to 15 Hole
 Fixation with 5 mm & 6 mm Screw

LOCK. D.C. PLATE (4.5 mm x Narrow)
 CAT No. 502



Size : 4 Hole to 18 Hole
 Fixation with 5 mm Lock. Screw

LOCK. D.C.S. PLATE (95°)
 CAT No. 506



Size : 5 Hole to 16 Hole
 Fixation with 5 mm & 6.5 mm Lock. Screw

LOCK. D.C. PLATE (4.5 mm x Broad)
 CAT No. 503



Size : 5 Hole to 18 Hole
 Fixation with 5 mm Lock. Screw

LOCK. D.H.S. PLATE (D.C. HOLE) 130° & 135°
 CAT No. 507



Size : 4 Hole to 10 Hole
 Fixation with 5 mm Screw

LOCK. LATERAL TIBIA PLATE (LEFT & RIGHT)
 CAT No. 504



Size : 4 Hole to 16 Hole
 Fixation with 5 mm & 6.5 mm Lock. Screw

LOCK. CONDYLAR BUTTRESS PLATE (LEFT & RIGHT)
 CAT No. 508



Size : 4 Hole to 16 Hole
 Fixation with 5 mm & 6.5 mm Lock. Screw

LOCK. L-BUTTRESS PLATE (LEFT & RIGHT)

CAT No. 509



Size : 3 Hole to 12 Hole
Fixation with 5 mm & 6.5 mm Lock. Screw

LOCK. DISTAL RADIUS PLATE

CAT No. 513



Size : 3 Hole to 8 Hole
Fixation with 4 mm Lock. Screw

LOCK. T-BUTTRESS PLATE

CAT No. 510



Size : 3 Hole to 16 Hole
Fixation with 5 mm & 6.5 mm Lock. Screw

LOCK. LOWER TIBIA PLATE (ANATOMICAL)

CAT No. 514



Size : 3 Hole to 10 Hole
Fixation with 4 mm & 5 mm Lock. Screw

LOCK. PROXIMAL HUMERUS PLATE (4 mm)

CAT No. 511



Size : 3 Hole to 8 Hole
Fixation with 4 mm Lock. Screw

LOCK. RECONSTRUCTION PLATE (3.5 mm & 4.5 mm)


CAT No. 515-A



Size : 4 Hole to 16 Hole
Fixation with 4 mm & 5 mm Lock. Screw

LOCK. T-OBLIQUE PLATE (LEFT & RIGHT)

CAT No. 512

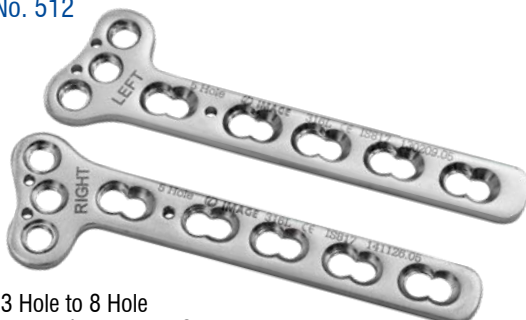

Size : 3 Hole to 8 Hole
Fixation with 4 mm Lock. Screw

LOCK. RECONSTRUCTION PLATE (C TYPE)


CAT No. 515-B



Size : 6 Hole to 16 Hole
Fixation with 4 mm Lock. Screw

LOCK. PROXIMAL TIBIA HEAD BUTTRESS PLATE (RAFT PLATE) (LEFT & RIGHT)

CAT No. 516

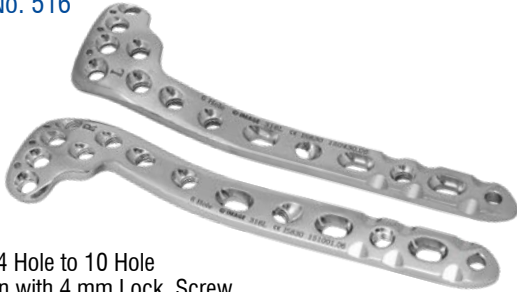

Size : 4 Hole to 10 Hole
 Fixation with 4 mm Lock. Screw

LOCK. DISTAL HUMERUS PLATE MEDIAL TYPE (LEFT & RIGHT)

CAT No. 521



Size : 4 Hole
 Fixation with 3 mm & 4 mm Lock. Screw

LOCK. PROXIMAL FEMUR PLATE (LEFT & RIGHT)

CAT No. 517



Size : 5 Hole to 14 Hole
 Fixation with 5 mm & 6.5 mm Lock. Screw

LOCK. T. POSTERIOR MEDIAL TIBIA PLATE (LEFT & RIGHT)


CAT No. 522



Size : 4 Hole to 16 Hole
 Fixation with 4 mm Lock. Screw

LOCK. DISTAL HUMERUS PLATE WITH SUPPORT (LEFT & RIGHT)

CAT No. 519

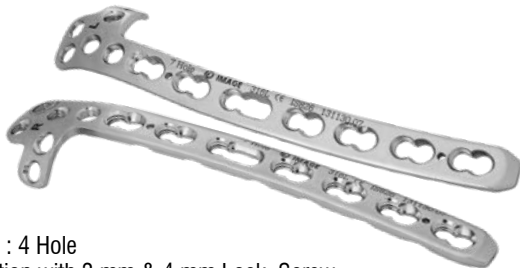

Size : 4 Hole
 Fixation with 3 mm & 4 mm Lock. Screw

LOCK. CLAVICLE PLATE (LEFT & RIGHT)

CAT No. 523



Size : 5 Hole to 10 Hole
 Fixation with 4 mm Lock. Screw

LOCK. DISTAL HUMERUS PLATE WITHOUT SUPPORT (LEFT & RIGHT)

CAT No. 520



Size : 4 Hole
 Fixation with 3 mm & 4 mm Screw

LOCK. PHILOS PLATE

CAT No. 524



Size : 4 Hole to 12 Hole
 Fixation with 4 mm Lock. Screw

LOCK. OLECRANON PLATE (LEFT & RIGHT)


CAT No. 525



Size : 4 Hole to 12 Hole
Fixation with 4 mm Lock. Screw

LOCK. HEAD VOLAR PLATE (LEFT & RIGHT)

CAT No. 529

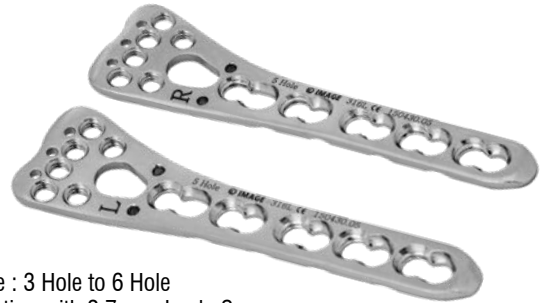

Size : 3 Hole to 6 Hole
Fixation with 2.7 mm Lock. Screw

LOCK. T-VOLAR PLATE

CAT No. 526



Size : 3 Hole to 6 Hole
Fixation with 2.7 mm Lock. Screw

LOCK. DORSAL RADIUS PLATE (LEFT & RIGHT)

CAT No. 530



Size : 2 Hole to 6 Hole
Fixation with 2.7 mm Lock. Screw

LOCK. T-OBLIQUE VOLAR PLATE (LEFT & RIGHT)

CAT No. 527



Size : 2 Hole to 6 Hole
Fixation with 2.7 mm Lock. Screw

LOCK. DORSAL RADIUS PLATE (OBLIQUE) (LEFT & RIGHT)

CAT No. 531



Size : 2 Hole to 6 Hole
Fixation with 2.7 mm Lock. Screw

LOCK. EXTRA ARTICULAR PLATE (LEFT & RIGHT)

CAT No. 528



Size : 3 Hole to 6 Hole
Fixation with 2.7 mm Lock. Screw

LOCK. ANTEROLATERAL DISTAL TIBIA PLATE (LEFT & RIGHT)

CAT No. 532



Size : 4 Hole to 16 Hole
Fixation with 3 mm & 4 mm Lock. Screw

LOCK. EXTRA ARTICULAR DISTAL HUMERUS PLATE (LEFT & RIGHT)


CAT No. 533



Size : 4 Hole to 12 Hole
 Fixation with 4 mm & 5 mm Lock. Screw

LOCK. SUPERIOR CLAVICLE PLATE (LEFT & RIGHT)

CAT No. 535

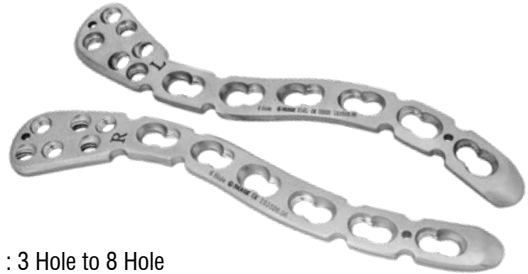

Size : 3 Hole to 8 Hole
 Fixation with 2.7 mm & 4 mm Lock. Screw

LOCK. DISTAL FEBULA PLATE (2.7 mm)

CAT No. 534-A



Size : 2 Hole to 6 Hole
 Fixation with 2.7 mm & 4.0 mm Lock. Screw

LOCK. DISTAL MEDIAL TIBIA PLATE (LEFT & RIGHT)

CAT No. 536



Size : 4 Hole to 5 Hole
 Fixation with 4 mm Lock. Screw

LOCK. DISTAL FEBULA PLATE (4 mm)

CAT No. 534-B




Size : 3 Hole to 7 Hole
 Fixation with 4 mm Lock. Screw

LOCK. ONE - THIRD TUBULAR PLATE

CAT No. 537




Size : 4 Hole to 10 Hole
 Fixation with 4 mm Lock. Screw

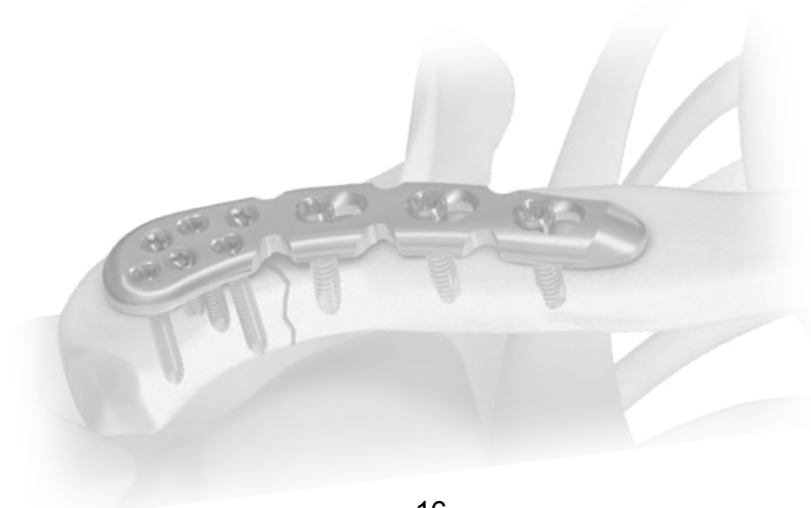

LOCK. CALCANIUM PLATE (4 mm)

CAT No. 539

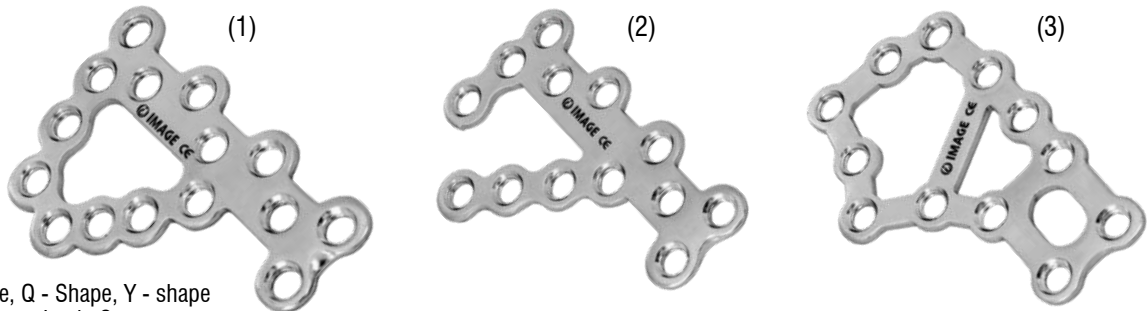

Size : P - Shape, Q - Shape, Y - shape
 Fixation with 4 mm Lock. Screw

LOCK. POSTERIOR TIBIA PLATE

CAT No. 540



Size : 1 Hole to 6 Hole
 Fixation with 4 mm Lock. Screw

T. S. PLATE

CAT No. 542



4.5 mm Cortical Screw & 6.5 mm Cans. Screw

LOCK. CLAVICLE HOOK PLATE (LEFT & RIGHT)

CAT No. 541




Size : 3 Hole to 6 Hole
 Fixation with 4 mm Lock. Screw

LOCK. RECONSTRUCTION PLATE (COMBI HOLE)

CAT No. 543



Size : 4 Hole to 6 Hole
 Fixation with 4 mm Lock. Screw

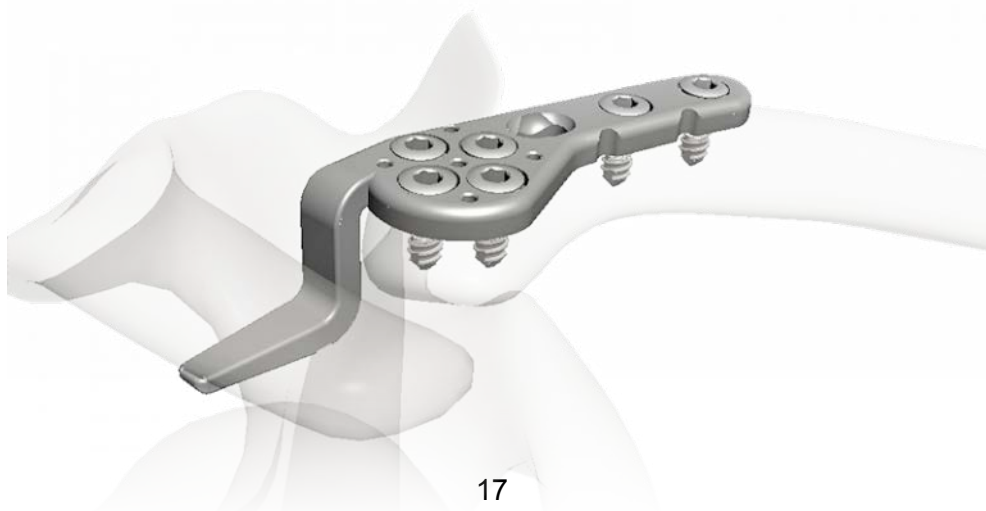

HIP PROSTHESIS SYSTEM

AUSTIN MOORE PROSTHESIS (IMAGE - XL)

CAT No. 701



Size : 35 mm to 55 mm with 2 mm Variation

BIPOLAR HIP PROSTHESIS (DLX.) (NON FENESTRATED)

CAT No. 702



Size : 37 mm to 55 mm with 2 mm Variation

BIPOLAR HIP PROSTHESIS (DLX.) (FENESTRATED)

CAT No. 703



Size : 37 mm to 55 mm with 2 mm Variation

MODULAR BIPOLAR HIP PROSTHESIS

CAT No. 704.01



Small

Medium

Large

Size : 39 mm to 53 mm with 2 mm Variation

WITH COLLAR

CAT No. 704.02



Size : 110 mm, 130 mm, 150 mm, 175 mm, 200 mm, 250 mm

COLLARLESS

CAT No. 704.03





Size : 110 mm, 130 mm, 150 mm, 175 mm, 200 mm, 250 mm

DELUXE STEM

CAT No. 704.04



Size : No-1, No-2, No-3

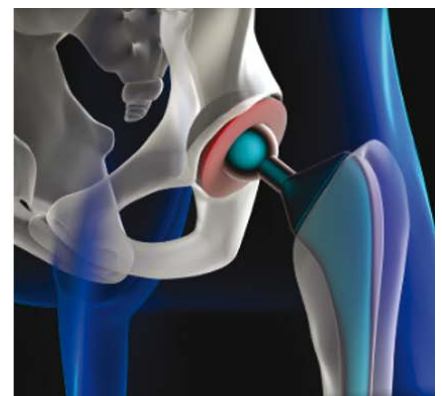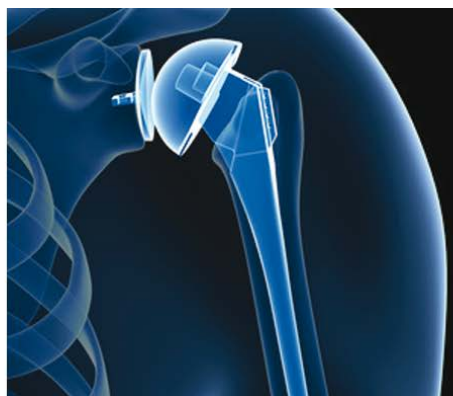

HIP PROSTHESIS SYSTEM

UNCEMENTED STEM

CAT No. 704-UC



Size : No-1, No-2, No-3, No-4, No-5

THOMPSON HIP PROSTHESIS (IMAGE - XL)

CAT No. 706




Size : 37 mm to 53 mm with 2 mm Variation

SHOULDER PROSTHESIS (IMAGE - XL) (NEER PROSTHESIS)

CAT No. 705




Size : 35 mm to 41 mm with 2 mm Variation

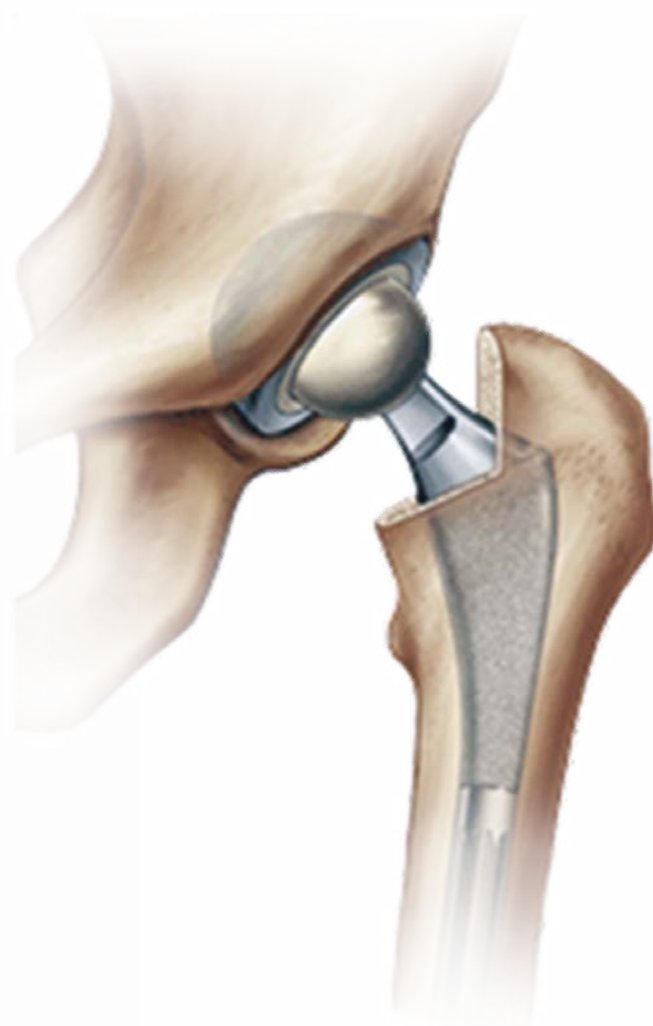

EXTERNAL FIXATION (Clamp Type)

A.O. CLAMP (11 mm)

CAT No. 801.01

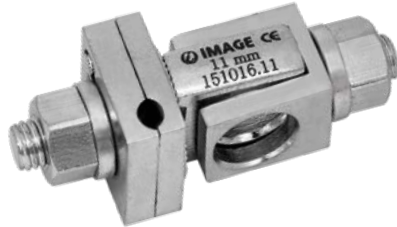

Size : Single Pin & Double Pin
Fixation with 11 mm Rod

DISTECTOR ROD

CAT No. 801.05 (11 mm)

CAT No. 802.04 (4 mm)



TRANSVERSE CLAMP (11 mm)


CAT No. 801.02



Fixation with 11 mm Rod

A.O. CLAMP (2.5 mm & 3.5 mm)

CAT No. 802.01

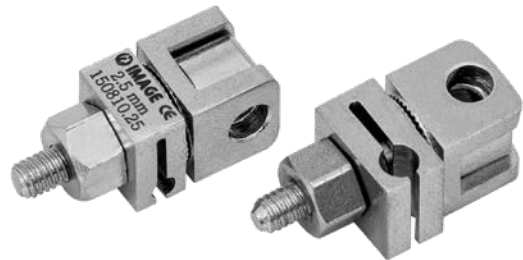

Fixation with 4 mm Rod

ROD TO ROD CLAMP (11 mm)

CAT No. 801.03



Fixation with 11 mm Rod

ADJUSTABLE CLAMP

CAT No. 802.02



A.O. ROD (4 mm & 11 mm)

CAT No. 801.04



Size (4 mm) : 100 mm to 300 mm
Size (8 mm) : 100 mm to 400 mm
Size (11 mm) : 100 mm to 450 mm

AESCLAP CLAMP

CAT No. 803.01



Size : 8 x 5 mm, 8 x 8 mm, 4 x 4 mm, 4 x 2.5 mm
Fixation with 8 mm Rod


EXTERNAL FIXATION (Ring Type)

HALF RING
CAT No. 901.01




Size : 140 mm, 160 mm, 180 mm, 200 mm

WIRE FIXATION BOLT (SIDE & MID. HOLE)
CAT No. 901.07

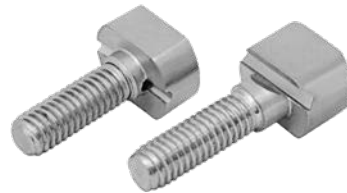

THREADED ROD
CAT No. 901.04

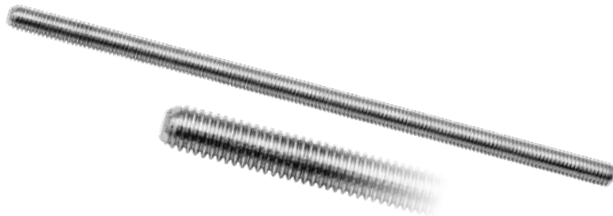

Size : 80 mm to 450 mm

CONNECTION PLATE
CAT No. 901.08



Size : 2 Hole to 7 Hole

K. WIRE (TROCAR POINT & BAYONET POINT)
CAT No. 901.05



Size : 1.5 mm & 1.8 mm

HINGES (MALE / FEMALE)
CAT No. 901.10



OLIVE WIRE (BAYONET POINT)
CAT No. 901.06



Size : 1.5 mm & 1.8 mm

POST (MALE / FEMALE)
CAT No. 901.11



Size : 2 Hole to 4 Hole

EXTERNAL FIXATION (Ring Type)

WRENCH CUBE

CAT No. 901.12



Size : 1 Hole to 5 Hole

CONNECTING NUT

CAT No. 901.16



Size : 6 mm

HEXAGONAL SOCKET (Thread)

CAT No. 901.14



Size : 20, 30 & 40 mm

CONNECTING BOLT

CAT No. 901.17



Size : 10 to 30 mm


OBLIQUE SUPPORT

CAT No. 901.15



K. WIRE TENSIONER

CAT No. 901.23

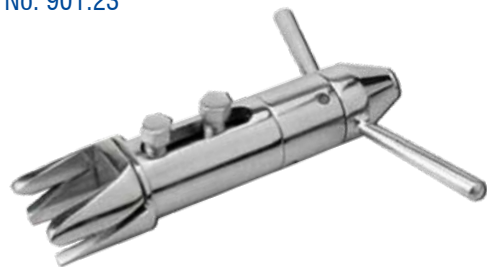

L. R. S.

CAT No. 1127



Size : 300 mm & 400 mm


DISTRACTOR ROD (R/U)


CAT No. 1128



Size : 100 mm to 400 mm with 50 mm Variation

Anatomical Locations for the Locking Compression Plates

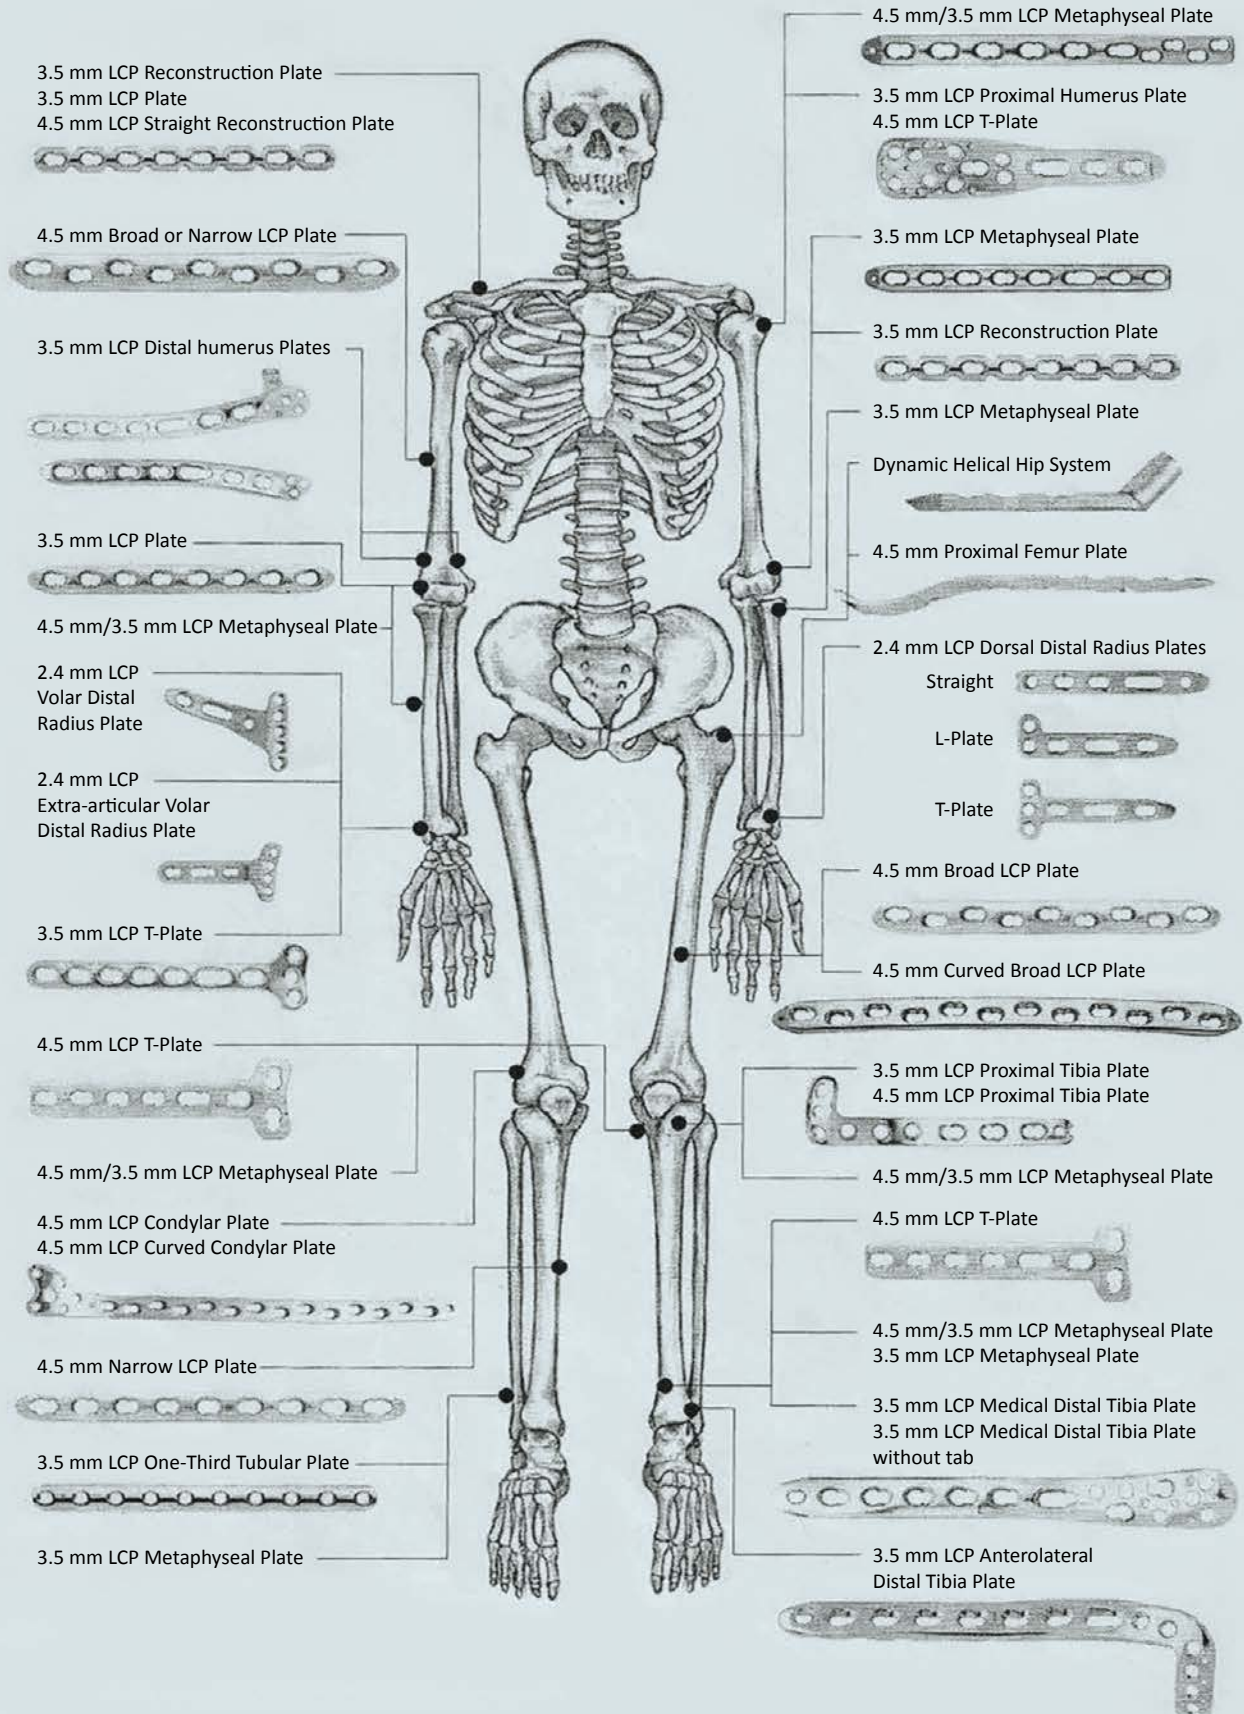

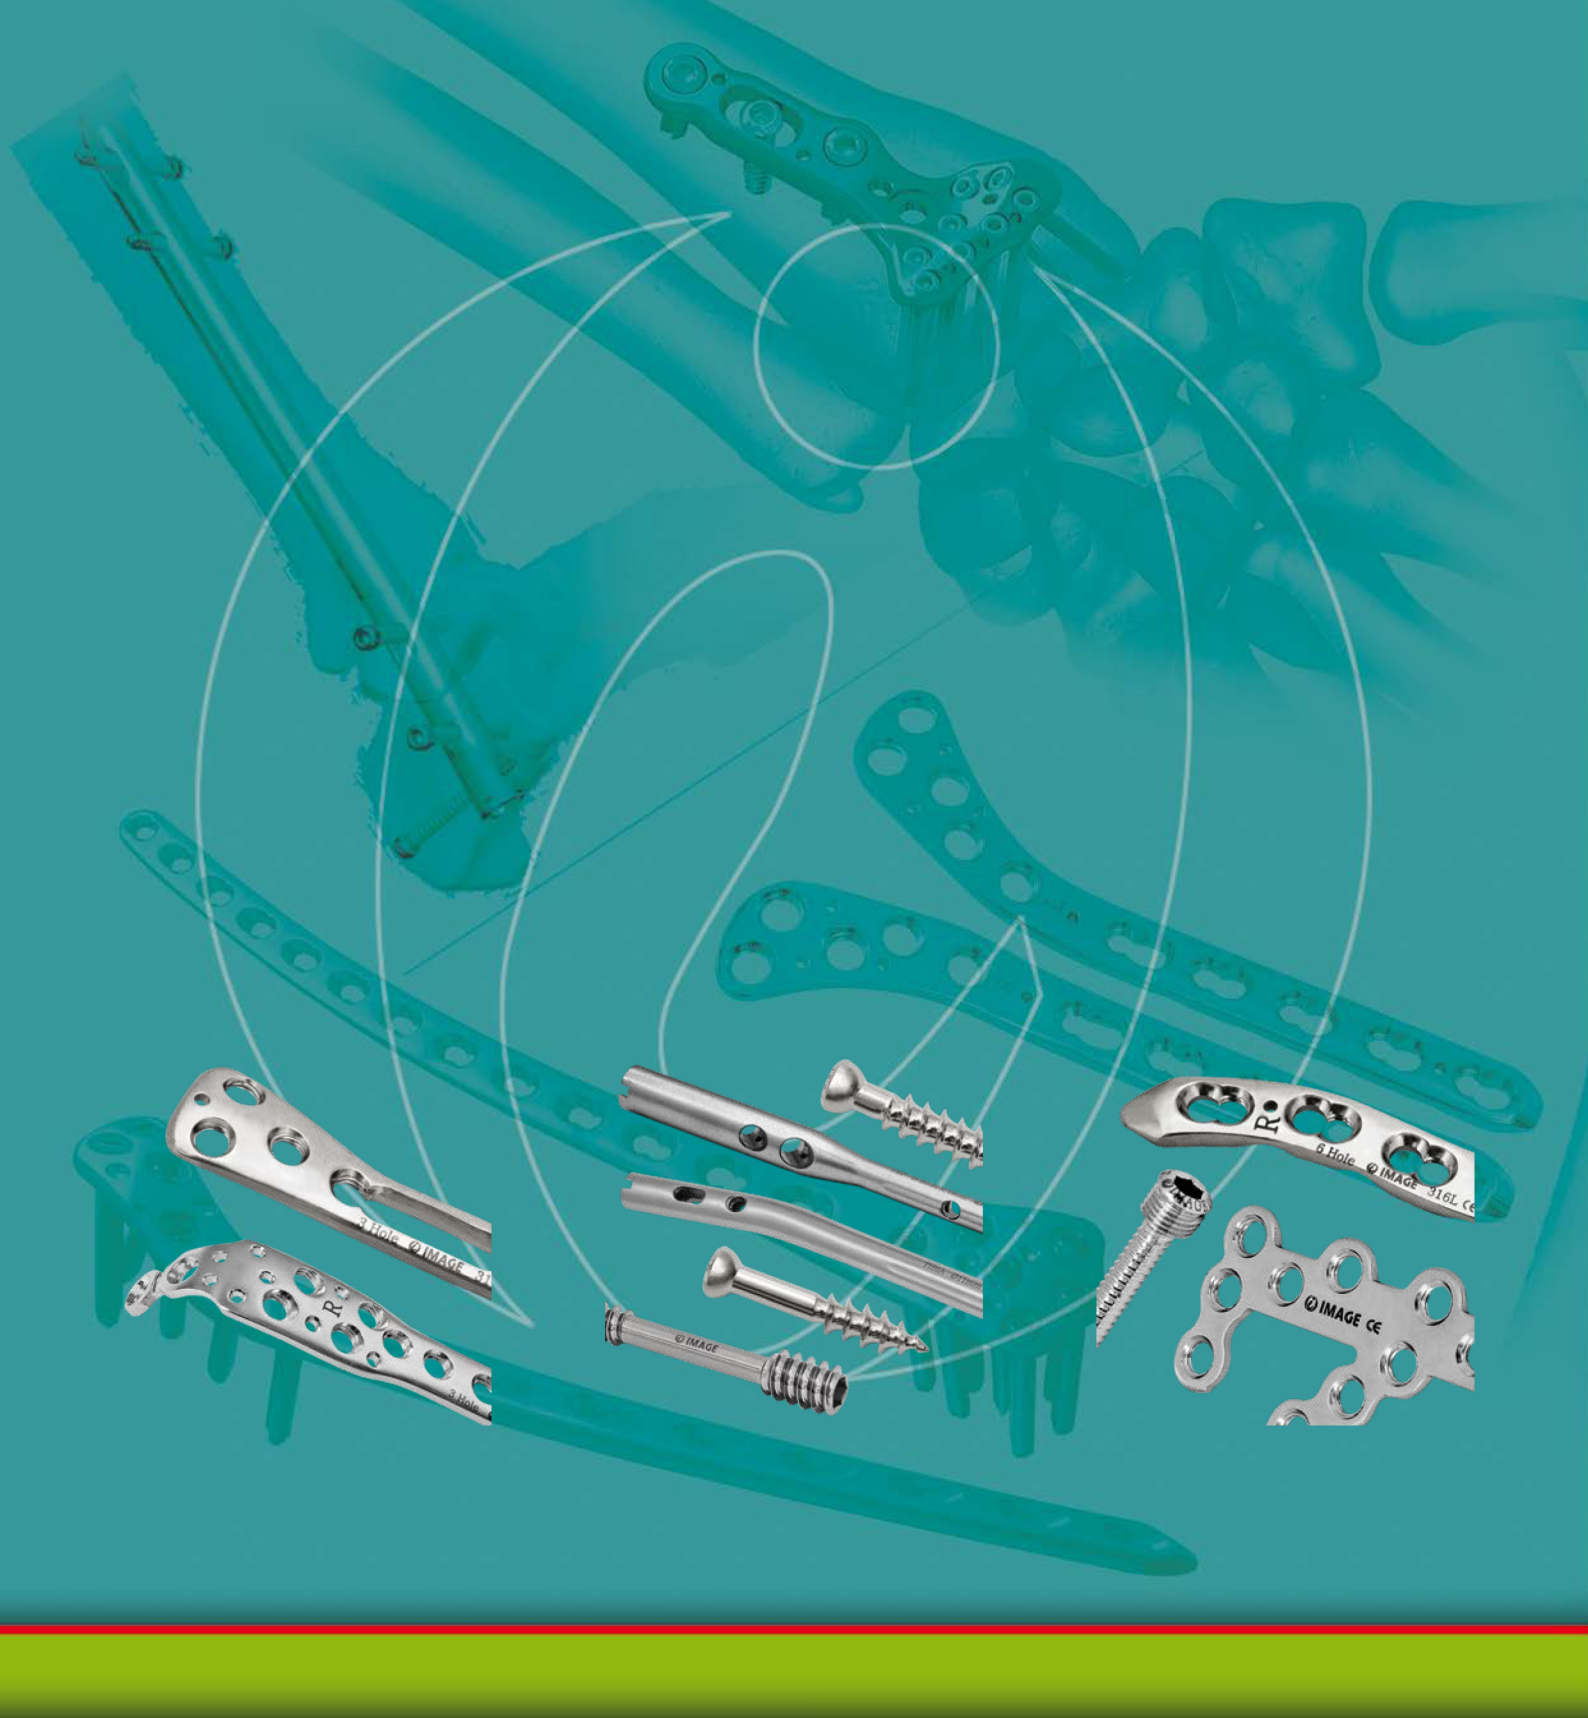

IMAGE[®]
ORTHO. SURGICAL PVT. LTD.
 An ISO 13485 Certified Company



MEDIQUIP GLOBAL
 EQUIPPING TO DELIVER QUALITY

Our products subject to change without prior notice.



Authorised Dealer :

Head Office - Nairobi
 Lower Hill Duplex, Suite No. 45
 trauma@mediquipglobal.org
 info@mediquipglobal.org
 +254 722 527 476

Kisumu Branch Office & Display Showroom
 Swan Centre Building, Ground Floor
 +254 706 024 239